


neoV

4 ch. DVR

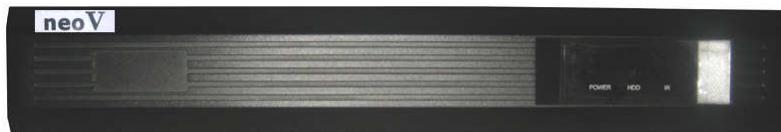

ADV-104

(Rear view)

c/w VGA Output



ADV-104EV

(Rear view)

Model	ADV - 104	ADV - 104EV
Operation type	Pentaplex (Local Record, Local Playback/Local Settings, Remote Playback/Record, Remote View, Remote Settings)	
Video Input / Output	In: 4xBNC, Out: 2xBNC	In: 4xBNC, Out: 2xBNC, 1xVGA
Display Mode	1/4 ch.	
Resolution (max.)	Display: 720x576, Record: 720x576	
Speed (max.)	Display: 100 fps, Record: DI :25fps, HD1 :50fps, CI :100fps	
Playback channel	1 ch.	
Record Mode	Manual / Continuous / Schedule / Motion	
Pre / Post Record Duration	Pre: 0 ~ 10 sec. ; Post : 0 ~ 60 minutes	
Search Mode	Time / Date / Event / Motion / Camera	
Video Compression Format	H.264	
Image Quality	Level : 1 ~ 9	
Audio Input & Output	In: 1xRCA, Out: 1xRCA	
Alarm Input & Output	In: 4 ch.(Pin), Out: 1ch.(Pin) (NC/NO)	
Motion Detection Area & Sensitivity	Area: 14(H) x 27(V), Sensitivity:1~10	
Privacy Masking	-	
Console Function	Auto Recover after power resume, Colour, Hue, Brightness, Contrast, Saturation, Watermark	
Hardisc Bay	1 x (SATA)	
USB Interface	Pendrive, HDD backup, Firmware upgrade	
CDRW / DVD RW	-	
PTZ Protocol	Pelco-D, Pelco-P, Merit Lilin, Baud Rate: 1200~19200bps.	
Network & Control Interface	RJ-45, RS485	
Network Function	5 users login (3 levels), Network setting, playback & record, multi display mode, Email, PTZ, TCP/IP, HTTP, PPPoE, DHCP, DDNS, TSP	
Remote Software	IE	
Power Supply & Consumption	DC12V 5A	
Operation Temperature & Humidity	0°C ~ 50°C (10%~90%)	
Dimension (approximate)	345(w) x 55(h) x 240(d) mm	
Weight (w/o Hardisc) (approximate)	3.5 kg	

** Design & specification are subject to change without prior notice **