

# RS-485/RS-232 Passive Signal Controlling Hub





Rear view

**AU - 801**

## Features :-

- Supports up to 8 units of controllers
- One RS-485 signal output
- Signals: RS-485: Data + / - , RS-232: TxD, RxD
- Max. support up to 256 units of speeddomes
- To extend transmission length of RS-485 signals up to 1200m
- LED indicators for power and signal transfer
- Built-in 120 ohm termination resistors for RS-485
- Built-in surge protection
- Support transmit baud rate to 9600bps
- Power supply: DC12V 500mA

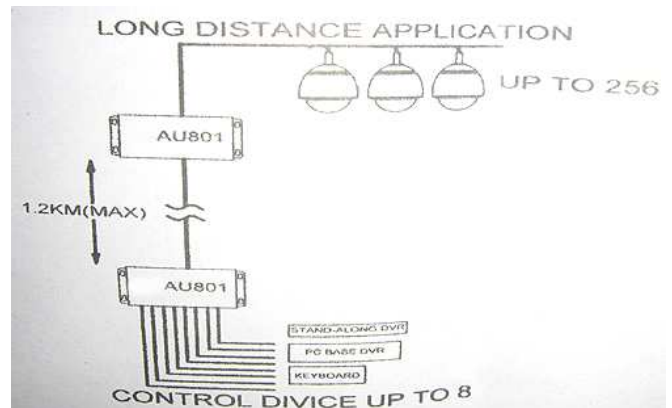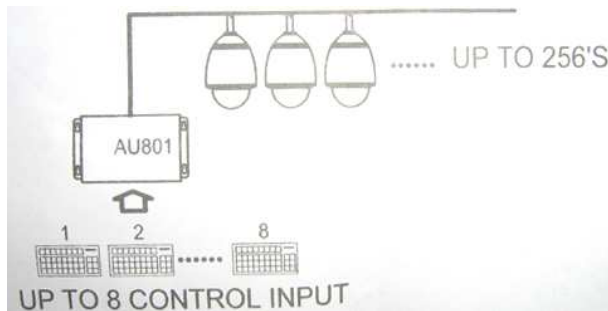

\*\* Design & specification are subject to change without prior notice \*\*