

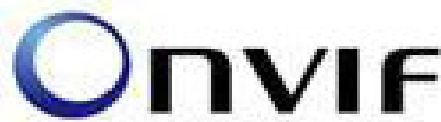



HD**Network CCTV Camera System****ViR - 921****Network Vandal Proof Night View Dome Camera**



Features :

- 1/2.8" 2MP Sony Exmor CMOS sensor
- ARM 9 framework, embedded SOC system
- Maximum resolution of 1080P @ 30fps
- Support backlight compensation and image flip
- Support 3D noise reduction, de-interlace, image enhancement, edge enhancement, gamma adjustment
- 2.8mm-10mm HD varifocal lens, ICR dual filter switch
- 30 meters effective IR distance
- Support H.264 Baseline Profile/Main Profile/High Profile encoding type
- Support audio input/output, alarm input
- Support dual-stream transmission, Vice stream D1@30FPS
- Support IOS/Android/WindowsMobile phone browse & control
- Support electronic amplification and electronic drag
- Dual-core backup
- Support video motion detection (VMD), sensitive areas block
- Automatically obtain IP (DHCP), automatic dialing (PPPOE), automatic port mapping (UPnP), DNS (DDNS)
- Support the NFS protocol, FTP download
- Support POE
- Support USB

VZOR*the supplier of electronic security system***HD****Network CCTV Camera System****ViR - 922****Network Outdoor Night View Camera**

Features :

- 1/2.8 inch 2MP Sony Exmor CMOS low illumination sensor
- ARM9 framework, embedded SOC System
- Resolution: 1080P@30fps
- Support WDR, BLC and image flip
- Support 3D noise reduction/de-interlace/image enhancement/Edge Enhancement, Gamma adjustment
- 2.8-12mm HD Manual Zoom lens, ICR
- 30-50m IR distance
- Support H.264 BaseLine Profile / Main Profile
- Support dual-stream transmission, second-stream D1@30FPS
- Support audio input& output and alarm input
- Support IOS/Android/WindowsMobile view and control
- Support electronic amplification and electronic drag
- Support Dual-core backup
- Support video motion detection(VMD)
- Support DHCP/PPPOE/UPnP/DDNS
- Support NFS protocol /FTP download
- IP66
- Support POE
- Support USB interface

VZOR*the supplier of electronic security system***HD****Network CCTV Camera System****ViSD - 221R Network Night View Speedome Camera**

Features :

- 1/2.8" 2.1Megapixel SONY Exmor CMOS sensor
- 20X optical zoom, 14 IR array LEDs, IR distance:120-150m
- Precise motor,the precision deviation is less than 0.05 degrees, image stabilization under any speed
- Build-in heater, reduce internal temperature, defog
- Support standard API interface, support SDK, Onvif, CGI
- Support PAL/NTSC
- Support 3D position
- Manual horizontal control speed: 0.05-160 %/s, preset accuracy0.05°
- 360°continuous pan rotation, -11°~90°tilt rotation.
- Support triple stream output, main stream 1080p@30fps
- Support IVA: trip wire, perimeter, alarm counting
- Support WDR,light suppression, 3D Noise Reduction, image flip, NIR enforcement
- Support defog, digital anti-shake
- Support AAC encode, 48K sampling rate,high definition audio
- Support time template setup
- Support dual-core backup
- Support ROI, key region video compress technology
- IPV6\MTU setup\Multicast\Heartbeat\IP Filter\SNMP
- IP66, TVS 4000V, lightning protection
- Support 32G MicroSD Card for local storage